

HT330 Series

Rugged Handheld Terminal



Quick Start Guide

609356G V1.3

► Package

Please make sure the following contents are in the HT330 gift box.
If something is missing or damaged, please contact your Unitech representative.

► The Package Contents

- HT330 Terminal
- Battery
- Hand Strap
- USB Type-C Cable
- Quick Start Guide

► Optional Accessories

- Boot Case
- Gun Grip
- Terminal Power Adaptor
- HT330 1-Slot Charging Cradle with spare Battery Slot
- HT330 1-Slot USB Cradle with spare Battery Slot
- Power Cord for Cradle
- Glass Screen Protector
- Stylus with coil strap

► Product View



- | | |
|------------------------|---------------------------|
| 1. Scanner Window | 10. 13MP Rear Camera |
| 2. LED Indicator | 11. Mic |
| 3. 5MP Front Camera | 12. Battery Lock |
| 4. 4" LCD Display | 13. Speaker |
| 5. Volume Key | 14. POGO Pin for Gun Grip |
| 6. Scanner Trigger Key | 15. Holes for Hand Strap |
| 7. Power Key | 16. Battery Cover |
| 8. Function Key | 17. POGO Pin |
| 9. Mic | 18. USB Type-C Port |

► Keypad View



WARNING!

There is a risk of fire and burns if the battery is handled improperly. DO NOT disassemble, crush, puncture, short external contacts, or dispose the battery pack in fire or water. DO NOT attempt to open or service the battery. Dispose of used batteries according to local recycling guidelines in your area.

CAUTION!

To ensure the unit working properly, please keep all connectors away from the contaminants staying inside of them such as dust, grease, mud, and water. The negligence may cause the unit with no communication, short circuited, overheated and so on. If the connector is damaged, please ensure the connector is being fully repaired before using the unit to avoid causing short circuited.




<http://www.ute.com/>

▶ Inserting Micro SD/Nano SIM Card (Phone Ver. Only)


Inserting the Nano SIM Card

Push up the SIM card holder to unlock and flip the card holder to insert SIM card. Close the card holder and slide down to lock. Ensure that it is installed properly.

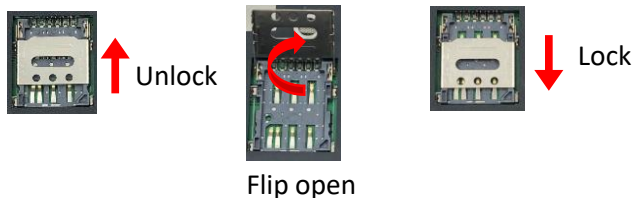

Inserting the Micro SD Card

Push the SD card holder to the right to unlock and flip the card holder to insert the SIM card. Close the card holder and push to the left to lock. Ensure that it is installed properly.

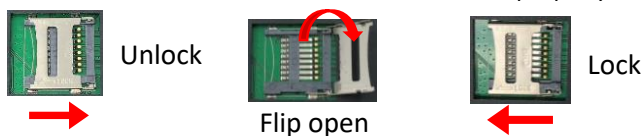

▶ Install the Battery Cover


Insert the battery cover in the direction as shown in the picture below:

1. There are three hooks on the bottom of battery cover, align the hooks with the recesses on the battery compartment.



2. Insert the battery cover up to 45 degrees (45°) angle, from bottom to top.



3. Press down the battery cover to secure in place. Make sure there is no gap between the device and the battery cover.
4. Push the battery lock to the left  to lock. Make sure the battery cover is securely closed, or you may not be able to turn on the terminal.




▶ Remove the battery

Pick the battery from the bottom, and lift to remove.



▶ Remove Battery Cover to Install Battery

Remove the battery cover in the direction as shown in the picture below:

1. Push the battery lock to the right  to unlock.



2. Grab the battery cover from the two recesses on the side, and lift to remove the battery cover.



3. Align the battery with the battery compartment, then push forward until you hear a click sound.



4. Press down the battery to secure in place.

▶ Checking LED Status

LED	Description
Red Light	<ul style="list-style-type: none">• Battery Charging• Twinkling to indicate battery low status (less than 15%)
Green Light	<ul style="list-style-type: none">• Battery Fully charged• Barcode scan good read
Blue Light	<ul style="list-style-type: none">• Message

If scanner app is running, LED is controlled by scanner app. No LED (Red and Green) display when battery is out. (even AC IN)

▶ Charging the battery

Before using the terminal for the first time, you need to charge it for about 24 hours. For the regular use, you can charge the terminal for 4.5 hours to recharge the battery to full capacity. To charge the terminal, please use the USB charging cable or the cradle.

Connect the type-C USB cable to the USB port on HT330 and the other end of the USB cable connect to AC power adapter into the electrical outlet on the USB plug. The charging LED indicator on HT330 is turning red when it is in charging state.